



DATI TECNICI DEI RACCORDI A CALZAMENTO TEFLONATI

TEFLONED QUICK FITTINGS TECHNICAL DATA

Fluido <i>Fluid</i>	Aria compressa, acqua (altri fluidi a richiesta) <i>Compressed air, water (other fluids on request)</i>			
Applicazioni <i>Applications</i>	Pneumatica (idraulica a bassa pressione) <i>Pneumatic (hydraulic systems with low pressure)</i>			
Temperature e pressioni <i>Pressure and temperature</i>	Le temperature e le pressioni dipendono dalle caratteristiche del tubo impiegato. <i>Pressions and temperatures depend on tube features.</i>			
Tubi consigliati <i>Recommended tubes</i>	1)Poliuretano <i>1)Polyurethane</i>	2)Poliammide <i>2)Polyamide</i>	3)Polietilene <i>3)Polyethylene</i>	4)Nylon <i>4)Nylon</i>
Tolleranze <i>Tolerances</i>	+/- 0.10 mm			
Materiali <i>Materials</i>	Corpo <i>Body</i>	Ottone nichelato CW614 N / CW617 N <i>Nickel plated brass CW614 N / CW617 N</i>		
	Dado <i>Nut</i>	Ottone nichelato CW614 N / CW617 N <i>Nickel plated brass CW614 N / CW617 N</i>		
Filettatura <i>Thread types</i>	BSP conica UNI-ISO 7 teflonata. <i>BSPT taper UNI-ISO 7 with teflon.</i>			
Diametri e filetti <i>Threads and diameters</i>	Diametri da 4 mm a 15 mm <i>Diameters from 4 mm to 15 mm</i> Filettature da 1/8" a 1/2" <i>Threads from 1/8" to 1/2"</i>			

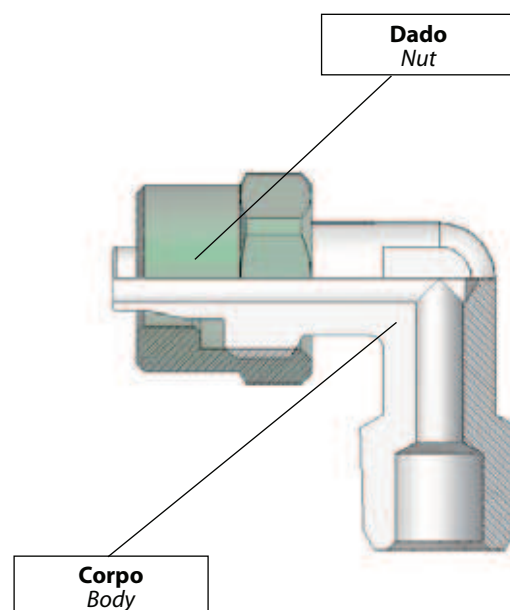

CT51K




DIRITTO MASCHIO CONICO BSPT TEFLONATO

TEFLONED MALE STRAIGHT TAPER BSPT

Codice/Code	ØT	F	H	L	CH	CH1		
CT51K1804	4/2,7	R1/8	8	23.8	8	12		100
CT51K1806	6/4	R1/8	8	26.5	12	12		100
CT51K1406	6/4	R1/4	11	30	12	14		100
CT51K1808	8/6	R1/8	8	26.5	14	12		100
CT51K1408	8/6	R1/4	11	30	14	14		100
CT51K1410	10/8	R1/4	10.5	32	16	14		50
CT51K3810	10/8	R3/8	11.5	32.5	16	17		50
CT51K3812	12/10	R3/8	11.5	35.5	18	17		50
CT51K1215	15/12,5	R1/2	14	40	22	22		20

CT55K



GOMITO MASCHIO CONICO BSPT TEFLONATO

TEFLONED ELBOW MALE TAPER BSPT

Codice/Code	ØT	F	H	L	L1	CH	CH1	
CT55K1804	4/2,7	R1/8	8	17	19.5	8	8	100
CT55K1806	6/4	R1/8	8.5	17	20.5	12	8	100
CT55K1406	6/4	R1/4	12.5	21	20.5	12	8	100
CT55K1808	8/6	R1/8	8	17	20.5	14	10	100
CT55K1408	8/6	R1/4	12.5	21	20.5	14	10	100
CT55K1410	10/8	R1/4	11	27	32	16	12	50
CT55K3810	10/8	R3/8	11.5	29	32	16	11	50
CT55K3812	12/10	R3/8	14	26	29	18	14	20
CT55K1215	15/12,5	R1/2	14	28	34	22	17	20