


RT51

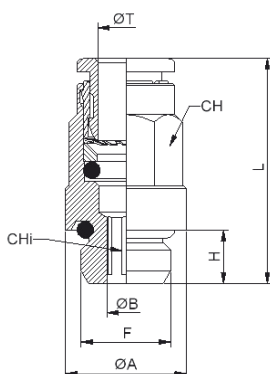


DIRITTO MASCHIO CILINDRICO BSPP

MALE STRAIGHT PARALLEL BSPP

| Codice/Code | ØT | F | ØA | ØB | H | L | CH | CHI | |
|-------------|----|------|------|------|-----|------|----|-----|-----|
| RT511804 | 4 | G1/8 | 13.5 | 2.6 | 5.5 | 19.5 | 9 | 2.5 | 100 |
| RT511404 | 4 | G1/4 | 17 | 2.6 | 6.5 | 19.5 | 9 | 2.5 | 50 |
| RT511806 | 6 | G1/8 | 13.5 | 4.2 | 5.5 | 24.8 | 11 | 4 | 100 |
| RT511406 | 6 | G1/4 | 17 | 4.2 | 6.5 | 22.8 | 11 | 4 | 100 |
| RT511808 | 8 | G1/8 | 12.8 | 5.2 | 5.5 | 26.5 | 13 | 5 | 100 |
| RT511408 | 8 | G1/4 | 17 | 6.2 | 6.5 | 24 | 13 | 6 | 100 |
| RT513808 | 8 | G3/8 | 20 | 6.2 | 7.5 | 24 | 13 | 6 | 50 |
| RT511410 | 10 | G1/4 | 16 | 7.3 | 6.5 | 28.9 | 16 | 7 | 50 |
| RT513810 | 10 | G3/8 | 21 | 8.3 | 7.5 | 29.4 | 16 | 8 | 50 |
| RT511210 | 10 | G1/2 | 24 | 8.3 | 9 | 28.9 | 16 | 8 | 50 |
| RT511412 | 12 | G1/4 | 16 | 7.3 | 6.5 | 31.9 | 19 | 7 | 50 |
| RT513812 | 12 | G3/8 | 22 | 10.3 | 7.5 | 31.9 | 19 | 10 | 50 |
| RT511212 | 12 | G1/2 | 24 | 10.3 | 9 | 31.2 | 19 | 10 | 50 |
| RT513814 | 14 | G3/8 | 21 | 10.3 | 7.5 | 34.1 | 21 | 10 | 20 |
| RT511214 | 14 | G1/2 | 25 | 12.3 | 9 | 33.6 | 21 | 12 | 20 |

RT51T

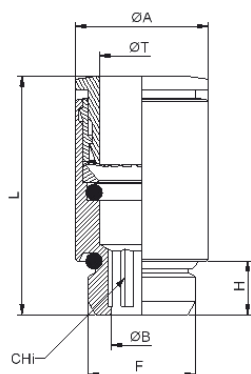


DIRITTO MASCHIO TONDO-METRICO

ROUND MALE STRAIGHT-METRIC

| Codice/Code | ØT | F | ØA | ØB | H | L | CHI | |
|-------------|----|----|----|-----|---|------|-----|-----|
| RT51TM504 | 4 | M5 | 9 | 2.6 | 4 | 20.5 | 25 | 100 |
| RT51TM506 | 6 | M5 | 11 | 2.6 | 4 | 23.8 | 2.5 | 100 |


RT52

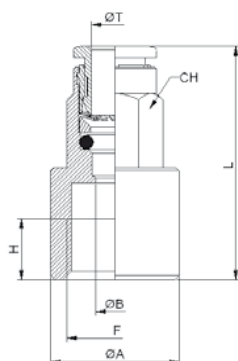


DIRITTO FEMMINA CILINDRICO BSPP

FEMALE STRAIGHT PARALLEL BSPP


| Codice/Code | ØT | F | ØA | ØB | H | L | CH | |
|-------------|----|------|----|----|-----|------|----|----|
| RT521804 | 4 | G1/8 | 12 | 3 | 6.5 | 26.5 | 9 | 50 |
| RT521404 | 4 | G1/4 | 17 | 3 | 10 | 29.5 | 9 | 50 |
| RT521806 | 6 | G1/8 | 12 | 5 | 6.5 | 28.3 | 11 | 50 |
| RT521406 | 6 | G1/4 | 17 | 5 | 10 | 31.3 | 11 | 50 |
| RT521808 | 8 | G1/8 | 12 | 7 | 6.5 | 28.5 | 13 | 50 |
| RT521408 | 8 | G1/4 | 17 | 7 | 10 | 32.5 | 13 | 50 |

RT53

DIRITTO INTERMEDIO
STRAIGHT INTERMEDIATE
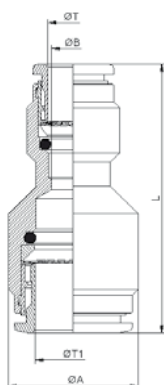
| Codice/Code | ØT | ØA | ØB | L | | | | |
|-------------|----|----|----|------|--|--|--|----|
| RT530004 | 4 | 3 | 11 | 32 | | | | 50 |
| RT530006 | 6 | 5 | 13 | 36.1 | | | | 50 |
| RT530008 | 8 | 7 | 15 | 38 | | | | 50 |
| RT530010 | 10 | 9 | 18 | 42.3 | | | | 50 |
| RT530012 | 12 | 11 | 21 | 45.8 | | | | 20 |
| RT530014 | 14 | 13 | 23 | 48.9 | | | | 20 |


RT53

DIRITTO INTERMEDIO RIDOTTO
STRAIGHT REDUCER

| Codice/Code | ØT1 | ØT | ØA | ØB | L | | | |
|-------------|-----|----|----|----|------|--|--|----|
| RT530604 | 6 | 4 | 13 | 3 | 34.8 | | | 50 |
| RT530804 | 8 | 4 | 15 | 3 | 36 | | | 50 |
| RT530806 | 8 | 6 | 15 | 5 | 37.8 | | | 50 |
| RT531004 | 10 | 4 | 18 | 3 | 38.9 | | | 50 |
| RT531006 | 10 | 6 | 18 | 5 | 40.7 | | | 50 |
| RT531008 | 10 | 8 | 18 | 7 | 40.9 | | | 50 |
| RT531208 | 12 | 8 | 21 | 7 | 43.6 | | | 20 |
| RT531210 | 12 | 10 | 21 | 9 | 44.5 | | | 20 |
| RT531410 | 14 | 10 | 23 | 9 | 47 | | | 20 |
| RT531412 | 14 | 12 | 23 | 10 | 48.7 | | | 20 |

RT54

L INTERMEDIO
L INTERMEDIATE

| Codice/Code | ØT | ØA | ØB | L | | | | |
|-------------|----|----|----|------|--|--|--|----|
| RT540004 | 4 | 9 | 3 | 17.3 | | | | 50 |
| RT540006 | 6 | 11 | 5 | 20.6 | | | | 50 |
| RT540008 | 8 | 13 | 7 | 23 | | | | 50 |
| RT540010 | 10 | 16 | 8 | 26.4 | | | | 50 |
| RT540012 | 12 | 19 | 10 | 28.9 | | | | 20 |
| RT540014 | 14 | 21 | 12 | 31.5 | | | | 20 |

RT55




T INTERMEDIO

T INTERMEDIATE

| Codice/Code | ØT | ØA | ØB | L | | | | | |
|-------------|----|----|----|------|--|--|--|--|----|
| RT550004 | 4 | 9 | 3 | 17.3 | | | | | 50 |
| RT550006 | 6 | 11 | 5 | 20.6 | | | | | 50 |
| RT550008 | 8 | 13 | 7 | 23 | | | | | 50 |
| RT550010 | 10 | 16 | 8 | 26.4 | | | | | 50 |
| RT550012 | 12 | 19 | 10 | 28.9 | | | | | 20 |
| RT550014 | 14 | 21 | 12 | 31.5 | | | | | 20 |

RT56

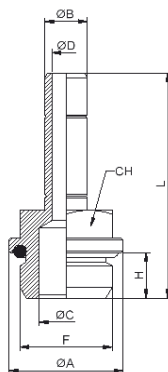

ADATTATORE CILINDRICO BSPP-METRICO

MALE ADAPTOR PARALLEL BSPP-METRIC

| Codice/Code | ØB | F | ØA | ØC | ØD | H | L | CH | |
|-------------|----|------|----|-----|-----|-----|------|----|----|
| RT56M504 | 4 | M5 | 8 | 2 | 2 | 4 | 24.2 | 8 | 50 |
| RT561804 | 4 | G1/8 | 13 | 6 | 2 | 5.5 | 27.7 | 13 | 50 |
| RT561404 | 4 | G1/4 | 16 | 7.5 | 2 | 6.5 | 30.7 | 13 | 50 |
| RT56M506 | 6 | M5 | 8 | 2.6 | 2.6 | 4 | 27.5 | 8 | 50 |
| RT561806 | 6 | G1/8 | 13 | 6 | 4 | 5.5 | 31 | 13 | 50 |
| RT561406 | 6 | G1/4 | 16 | 7.5 | 4 | 6.5 | 33.5 | 13 | 50 |
| RT561808 | 8 | G1/8 | 13 | 6 | 6 | 5.5 | 32.5 | 13 | 50 |
| RT561408 | 8 | G1/4 | 16 | 7.5 | 6 | 6.5 | 35 | 13 | 50 |
| RT563808 | 8 | G3/8 | 20 | 9 | 6 | 7.5 | 37 | 13 | 50 |
| RT561810 | 10 | G1/8 | 13 | 6 | 6 | 5.5 | 35.5 | 13 | 50 |
| RT561410 | 10 | G1/4 | 16 | 7.5 | 8 | 6.5 | 38 | 13 | 50 |
| RT563810 | 10 | G3/8 | 20 | 9 | 8 | 7.5 | 41 | 13 | 50 |
| RT561412 | 12 | G1/4 | 16 | 8 | 8 | 6.5 | 39 | 13 | 50 |
| RT563812 | 12 | G3/8 | 20 | 11 | 10 | 7.5 | 42 | 13 | 50 |
| RT561212 | 12 | G1/2 | 24 | 13 | 10 | 9 | 44 | 16 | 50 |
| RT563814 | 14 | G3/8 | 20 | 11 | 12 | 7.5 | 44.5 | 16 | 50 |
| RT561214 | 14 | G1/2 | 24 | 13 | 12 | 9 | 46.5 | 16 | 50 |


RT57



PROLUNGA

STRAIGHT PLUG-IN

| Codice/Code | ØB | ØA | L | | | | | | |
|-------------|----|----|------|--|--|--|--|--|-----|
| RT570004 | 4 | 2 | 33.4 | | | | | | 100 |
| RT570006 | 6 | 4 | 39 | | | | | | 50 |
| RT570008 | 8 | 6 | 42 | | | | | | 50 |
| RT570010 | 10 | 8 | 48 | | | | | | 50 |
| RT570012 | 12 | 10 | 50 | | | | | | 50 |
| RT570014 | 14 | 12 | 55 | | | | | | 20 |

RT58

ADATTATORE RIDUZIONE-MAGGIORAZIONE
REDUCER-INCREASER PLUG-IN

| Codice/Code | ØB | ØT | ØA | L | | | | | |
|-------------|----|----|----|------|--|--|--|--|----|
| RT580604 | 6 | 4 | 9 | 32.5 | | | | | 50 |
| RT580804 | 8 | 4 | 9 | 34 | | | | | 50 |
| RT580806 | 8 | 6 | 11 | 36.3 | | | | | 50 |
| RT581004 | 10 | 4 | 13 | 39 | | | | | 50 |
| RT581006 | 10 | 6 | 11 | 39.3 | | | | | 50 |
| RT581008 | 10 | 8 | 13 | 39 | | | | | 50 |
| RT581204 | 12 | 4 | 13 | 40 | | | | | 50 |
| RT581206 | 12 | 6 | 13 | 40.3 | | | | | 50 |
| RT581208 | 12 | 8 | 13 | 39.5 | | | | | 50 |
| RT581210 | 12 | 10 | 16 | 41.4 | | | | | 50 |
| RT581404 | 14 | 4 | 15 | 43.5 | | | | | 20 |
| RT581406 | 14 | 6 | 15 | 43.8 | | | | | 20 |
| RT581408 | 14 | 8 | 15 | 44 | | | | | 20 |
| RT581410 | 14 | 10 | 16 | 43.9 | | | | | 20 |
| RT581412 | 14 | 12 | 19 | 45.9 | | | | | 20 |
| RT5810406 | 4 | 6 | 11 | 35.5 | | | | | 50 |
| RT5810608 | 6 | 8 | 13 | 39 | | | | | 50 |

RT59


TAPPO MASCHIO
MALE PLUG-IN

| Codice/Code | ØB | ØA | L | | | | | | |
|-------------|----|----|------|--|--|--|--|--|----|
| RT590004 | 4 | 5 | 26 | | | | | | 50 |
| RT590006 | 6 | 7 | 29 | | | | | | 50 |
| RT590008 | 8 | 9 | 31.5 | | | | | | 50 |
| RT590010 | 10 | 11 | 35 | | | | | | 50 |
| RT590012 | 12 | 13 | 37 | | | | | | 50 |
| RT590014 | 14 | 15 | 39.5 | | | | | | 20 |

RT60

PASSALAMIERA

UNION BULKHEAD




| Codice/Code | ØT | M | ØB | L | lmax | | | |
|-------------|----|-----|----|------|------|--|--|----|
| RT600004 | 4 | M11 | 3 | 32 | 8 | | | 50 |
| RT600006 | 6 | M14 | 5 | 36.1 | 8 | | | 50 |
| RT600008 | 8 | M16 | 7 | 38 | 10 | | | 50 |
| RT600010 | 10 | M18 | 9 | 42.3 | 12 | | | 20 |
| RT600012 | 12 | M22 | 11 | 45.8 | 17 | | | 20 |
| RT600014 | 14 | M24 | 13 | 47.5 | 18 | | | 20 |

RT63

BANJO SINGOLO

BANJO (SINGLE)




| Codice/Code | ØT | ØA | ØB | C | L | | | |
|-------------|----|------|----|----|------|--|--|----|
| RT63M504 | 4 | M5 | 8 | 9 | 19.5 | | | 50 |
| RT631804 | 4 | 1/8" | 14 | 15 | 21.1 | | | 50 |
| RT631806 | 6 | 1/8" | 14 | 15 | 24.3 | | | 50 |
| RT631406 | 6 | 1/4" | 18 | 17 | 25.5 | | | 50 |
| RT631808 | 8 | 1/8" | 14 | 15 | 24.8 | | | 50 |
| RT631408 | 8 | 1/4" | 18 | 17 | 26.5 | | | 50 |
| RT633808 | 8 | 3/8" | 21 | 20 | 28 | | | 50 |
| RT631410 | 10 | 1/4" | 18 | 17 | 28.4 | | | 50 |
| RT633810 | 10 | 3/8" | 21 | 20 | 29.9 | | | 20 |
| RT633812 | 12 | 3/8" | 21 | 20 | 31.4 | | | 20 |
| RT631212 | 12 | 1/2" | 26 | 24 | 34,9 | | | 20 |
| RT631214 | 14 | 1/2" | 26 | 24 | 35.5 | | | 20 |


RT64

BANJO DOPPIO


BANJO (DOUBLE)




| Codice/Code | ØT | ØA | ØB | C | L | | | |
|-------------|----|------|----|----|------|--|--|----|
| RT64M504 | 4 | M5 | 8 | 9 | 19.5 | | | 50 |
| RT641804 | 4 | 1/8" | 14 | 15 | 21.1 | | | 50 |
| RT641806 | 6 | 1/8" | 14 | 15 | 24.3 | | | 50 |
| RT641406 | 6 | 1/4" | 18 | 17 | 25.5 | | | 50 |
| RT641808 | 8 | 1/8" | 14 | 15 | 24.8 | | | 50 |
| RT641408 | 8 | 1/4" | 18 | 17 | 26.5 | | | 20 |
| RT643808 | 8 | 3/8" | 21 | 20 | 28 | | | 20 |
| RT641410 | 10 | 1/4" | 18 | 17 | 28.4 | | | 20 |
| RT643810 | 10 | 3/8" | 21 | 20 | 29.9 | | | 20 |

RT65

BANJO SINGOLO GIREVOLE CILINDRICO BSPP-METRICO
ROTATING SINGLE BANJO PARALLEL BSPP-METRIC

| Codice/Code | ØT | F | ØA | H | L | L 1 | CHI | |
|-------------|----|------|-----|-----|------|------|-----|----|
| RT65M504 | 4 | M5 | 2 | 4 | 19.5 | 16.8 | 2 | 50 |
| RT651804 | 4 | G1/8 | 5.5 | 5.5 | 21.1 | 24.5 | 3 | 50 |
| RT651806 | 6 | G1/8 | 5.5 | 5.5 | 24.3 | 24.5 | 3 | 50 |
| RT651406 | 6 | G1/4 | 7.8 | 6.5 | 25.5 | 27.8 | 4 | 50 |
| RT651808 | 8 | G1/8 | 5.5 | 5.5 | 24.8 | 24.5 | 3 | 50 |
| RT651408 | 8 | G1/4 | 7.8 | 6.5 | 26.5 | 27.8 | 4 | 20 |
| RT653808 | 8 | G3/8 | 10 | 7.5 | 28 | 32.5 | 5 | 20 |
| RT651410 | 10 | G1/4 | 7.8 | 6.5 | 28.4 | 27.8 | 4 | 20 |
| RT653810 | 10 | G3/8 | 10 | 7.5 | 29.9 | 32.5 | 5 | 20 |
| RT653812 | 12 | G3/8 | 10 | 7.5 | 31.4 | 32.5 | 5 | 20 |
| RT651212 | 12 | G1/2 | 12 | 9 | 34.9 | 38.8 | 8 | 20 |
| RT651214 | 14 | G1/2 | 12 | 9 | 35.5 | 38.8 | 8 | 20 |

RT66

BANJO DOPPIO GIREVOLE CILINDRICO BSPP-METRICO
ROTATING DOUBLE BANJO PARALLEL BSPP-METRIC


| Codice/Code | ØT | F | ØA | H | L | L 1 | CHI | |
|-------------|----|------|-----|-----|------|------|-----|----|
| RT66M504 | 4 | M5 | 2 | 4 | 19.5 | 16.8 | 2 | 50 |
| RT661804 | 4 | G1/8 | 5.5 | 5.5 | 21.1 | 24.5 | 3 | 50 |
| RT661806 | 6 | G1/8 | 5.5 | 5.5 | 24.3 | 24.5 | 3 | 50 |
| RT661406 | 6 | G1/4 | 7.8 | 6.5 | 25.5 | 27.8 | 4 | 50 |
| RT661808 | 8 | G1/8 | 5.5 | 5.5 | 24.8 | 24.5 | 3 | 50 |
| RT661408 | 8 | G1/4 | 7.8 | 6.5 | 26.5 | 27.8 | 4 | 20 |
| RT663808 | 8 | G3/8 | 10 | 7.5 | 28 | 32.5 | 5 | 20 |
| RT661410 | 10 | G1/4 | 7.8 | 6.5 | 28.4 | 27.8 | 4 | 20 |
| RT663810 | 10 | G3/8 | 10 | 7.5 | 29.9 | 32.5 | 5 | 20 |

RT70

T MASCHIO AL CENTRO GIREVOLE CILINDRICO BSPP-METRICO
CENTRAL T MALE (ROTATING BODY) PARALLEL BSPP-METRIC

| Codice/Code | ØT | F | ØA | L | L 1 | CH | |
|-------------|----|------|----|------|------|----|----|
| RT70M504 | 4 | M5 | 9 | 17.3 | 20 | 8 | 50 |
| RT701804 | 4 | G1/8 | 11 | 17.3 | 18.5 | 13 | 50 |
| RT701806 | 6 | G1/8 | 11 | 20.6 | 18.5 | 13 | 50 |
| RT701406 | 6 | G1/4 | 11 | 22.1 | 22.5 | 16 | 50 |
| RT701808 | 8 | G1/8 | 13 | 23 | 20.5 | 13 | 50 |
| RT701408 | 8 | G1/4 | 13 | 23 | 22.5 | 16 | 20 |
| RT703808 | 8 | G3/8 | 13 | 24.5 | 25.5 | 18 | 20 |
| RT701410 | 10 | G1/4 | 16 | 26.4 | 24.5 | 16 | 20 |
| RT703810 | 10 | G3/8 | 16 | 26.4 | 25.5 | 18 | 20 |

RT71


T MASCHIO LATERALE GIREVOLE CILINDRICO BSPP-METRICO
LATERAL T MALE (ROTATING BODY) PARALLEL BSPP-METRIC




| Codice/Code | ØT | F | ØA | L | L 1 | CH | |
|-------------|----|------|----|------|------|----|----|
| RT71M504 | 4 | M5 | 9 | 17.3 | 20 | 8 | 50 |
| RT711804 | 4 | G1/8 | 11 | 17.3 | 18.5 | 13 | 50 |
| RT711806 | 6 | G1/8 | 11 | 20.6 | 18.5 | 13 | 50 |
| RT711406 | 6 | G1/4 | 11 | 22.1 | 22.5 | 16 | 50 |
| RT711808 | 8 | G1/8 | 13 | 23 | 20.5 | 13 | 50 |
| RT711408 | 8 | G1/4 | 13 | 23 | 22.5 | 16 | 20 |
| RT713808 | 8 | G3/8 | 13 | 24.5 | 25.5 | 18 | 20 |
| RT711410 | 10 | G1/4 | 16 | 26.4 | 24.5 | 16 | 20 |
| RT713810 | 10 | G3/8 | 16 | 26.4 | 25.5 | 18 | 20 |

RT72

GOMITO MASCHIO GIREVOLE CILINDRICO BSPP-METRICO
ELBOW MALE (ROTATING BODY) PARALLEL BSPP-METRIC




| Codice/Code | ØT | F | ØA | L | L 1 | CH | |
|-------------|----|------|----|------|------|----|-----|
| RT72M504 | 4 | M5 | 9 | 17.3 | 20 | 8 | 100 |
| RT721804 | 4 | G1/8 | 11 | 17.3 | 18.5 | 13 | 100 |
| RT721404 | 4 | G1/4 | 9 | 19 | 22.5 | 16 | 100 |
| RT72M506 | 6 | M5 | 11 | 20 | 20.6 | 8 | 100 |
| RT721806 | 6 | G1/8 | 11 | 20.6 | 18.5 | 13 | 100 |
| RT721406 | 6 | G1/4 | 11 | 22.1 | 22.5 | 16 | 100 |
| RT721808 | 8 | G1/8 | 13 | 23 | 20.5 | 13 | 50 |
| RT721408 | 8 | G1/4 | 13 | 23 | 22.5 | 16 | 50 |
| RT723808 | 8 | G3/8 | 13 | 24.5 | 25.5 | 18 | 50 |
| RT721410 | 10 | G1/4 | 16 | 26.4 | 24.5 | 16 | 50 |
| RT723810 | 10 | G3/8 | 16 | 26.4 | 25.5 | 18 | 50 |
| RT721210 | 10 | G1/2 | 11 | 27.9 | 29 | 21 | 20 |
| RT721412 | 12 | G1/4 | 19 | 28.9 | 24.5 | 16 | 20 |
| RT723812 | 12 | G3/8 | 19 | 28.9 | 24.5 | 18 | 20 |
| RT721212 | 12 | G1/2 | 19 | 28.9 | 31 | 21 | 20 |
| RT723814 | 14 | G3/8 | 21 | 31.5 | 28 | 18 | 20 |
| RT721214 | 14 | G1/2 | 21 | 31.5 | 33 | 21 | 20 |


RT73

Y INNESTABILE
Y CONNECTOR

| Codice/Code | ØT | ØT1 | ØA | L | L1 | L2 | | |
|-------------|----|-----|----|------|------|------|--|----|
| RT730006 | 6 | 6 | 11 | 43.1 | 23.1 | 25.8 | | 50 |
| RT730008 | 8 | 8 | 13 | 46.5 | 27.1 | 29 | | 50 |
| RT730010 | 10 | 10 | 16 | 51.8 | 33.1 | 32.4 | | 20 |

| | | | | | | | | |
|----------|----|---|------|------|------|------|--|----|
| RT730604 | 6 | 4 | 11.3 | 38.8 | 19.1 | 20.5 | | 50 |
| RT730806 | 8 | 6 | 13.3 | 44.8 | 23.1 | 25.8 | | 50 |
| RT731008 | 10 | 8 | 16.3 | 48.9 | 27.1 | 29 | | 20 |

RT75

FEMMINA PASSALAMIERA CILINDRICO BSPP
STRAIGHT FEMALE BULKHEAD PARALLEL BSPP

| Codice | ØT | F | M | A | H | L | CH | |
|----------|----|------|-----|------|-----|------|----|----|
| RT751804 | 4 | G1/8 | M10 | 15.5 | 6.5 | 25.5 | 15 | 50 |
| RT751806 | 6 | G1/8 | M14 | 15.8 | 6.5 | 26.8 | 15 | 50 |
| RT751406 | 6 | G1/4 | M14 | 15.8 | 10 | 31.3 | 17 | 50 |
| RT751808 | 8 | G1/8 | M16 | 16 | 6.5 | 29 | 17 | 50 |
| RT751408 | 8 | G1/4 | M16 | 16 | 10 | 33.5 | 17 | 50 |


RT77

CARTUCCIA IN OTTONE
BRASS CARTRIDGE

| Codice/Code | ØT | ØA | ØB | L | | | | |
|-------------|----|-----|------|----|--|--|--|-----|
| RT770004 | 4 | 2.9 | 7.8 | 14 | | | | 100 |
| RT770006 | 6 | 4.5 | 10 | 16 | | | | 100 |
| RT770008 | 8 | 6.5 | 12.3 | 17 | | | | 100 |

RT83

DOBPIO L GIREVOLE CILINDRICO BSPP

DOUBLE ELBOW (ROTATING BODY) PARALLEL BSPP




| Codice/Code | ØT | F | ØA | H | L | L1 | CH | CHi | |
|-------------|----|------|-----|-----|------|------|----|-----|----|
| RT831804 | 4 | G1/8 | 5.5 | 5.5 | 43.3 | 21.1 | 14 | 3 | 20 |
| RT831806 | 6 | G1/8 | 5.5 | 5.5 | 43.3 | 24.3 | 14 | 3 | 20 |
| RT731406 | 6 | G1/4 | 7.8 | 6.5 | 50 | 25.5 | 18 | 4 | 20 |
| RT831808 | 8 | G1/8 | 5.5 | 5.5 | 43.3 | 24.8 | 14 | 3 | 20 |
| RT831408 | 8 | G1/4 | 7.8 | 6.5 | 50 | 26.5 | 18 | 4 | 20 |
| RT831410 | 10 | G1/4 | 7.8 | 6.5 | 50 | 28.4 | 18 | 4 | 20 |

RT84


TRIPLO L GIREVOLE CILINDRICO BSPP

TRIPLE ELBOW (ROTATING BODY) PARALLEL BSPP



| Codice/Code | ØT | F | ØA | H | L | L1 | CH | CHi | |
|-------------|----|------|-----|-----|----|------|----|-----|----|
| RT841804 | 4 | G1/8 | 5.5 | 5.5 | 59 | 21.1 | 14 | 3 | 10 |
| RT841806 | 6 | G1/8 | 5.5 | 5.5 | 59 | 24.3 | 14 | 3 | 10 |
| RT841808 | 8 | G1/8 | 5.5 | 5.5 | 59 | 24.8 | 14 | 3 | 10 |

RT51K




DIRITTO MASCHIO CONICO BSPT

MALE STRAIGHT TAPER BSPT

| Codice/Code | ØT | F | H | L | CH | CHI | | |
|-------------|----|------|------|------|----|-----|--|-----|
| RT51K1804 | 4 | R1/8 | 8 | 19.5 | 10 | 2.5 | | 100 |
| RT51K1404 | 4 | R1/4 | 11 | 21.5 | 14 | 2.5 | | 50 |
| RT51K1806 | 6 | R1/8 | 8 | 24.8 | 11 | 4 | | 100 |
| RT51K1406 | 6 | R1/4 | 11 | 23.8 | 14 | 4 | | 100 |
| RT51K1808 | 8 | R1/8 | 8 | 28 | 13 | 5 | | 100 |
| RT51K1408 | 8 | R1/4 | 11 | 24 | 14 | 6 | | 100 |
| RT51K3808 | 8 | R3/8 | 11.5 | 24.5 | 17 | 6 | | 50 |
| RT51K1410 | 10 | R1/4 | 11 | 28.9 | 16 | 7 | | 50 |
| RT51K3810 | 10 | R3/8 | 11.5 | 29.4 | 17 | 8 | | 50 |
| RT51K1210 | 10 | R1/2 | 14 | 29.4 | 22 | 8 | | 50 |
| RT51K1412 | 12 | R1/4 | 11 | 35.5 | 19 | 7 | | 50 |
| RT51K3812 | 12 | R3/8 | 11.5 | 32 | 19 | 10 | | 50 |
| RT51K1212 | 12 | R1/2 | 14 | 31.3 | 22 | 10 | | 50 |
| RT51K3814 | 14 | R3/8 | 11.5 | 37.5 | 21 | 10 | | 20 |
| RT51K1214 | 14 | R1/2 | 14 | 35 | 22 | 10 | | 20 |

RT70K




T MASCHIO AL CENTRO GIREVOLE CONICO BSPT

CENTRAL T MALE (ROTATING BODY) TAPER BSPT

| Codice/Code | ØT | F | ØA | H | L | L1 | CH | |
|-------------|----|------|----|------|------|------|----|----|
| RT70K1804 | 4 | R1/8 | 11 | 8 | 17.3 | 18.6 | 13 | 50 |
| RT70K1806 | 6 | R1/8 | 11 | 8 | 19.8 | 18.6 | 13 | 50 |
| RT70K1406 | 6 | R1/4 | 11 | 11 | 22.1 | 23.5 | 14 | 50 |
| RT70K1808 | 8 | R1/8 | 13 | 8 | 23 | 20.5 | 13 | 50 |
| RT70K1408 | 8 | R1/4 | 13 | 11 | 23 | 23.5 | 14 | 50 |
| RT70K3808 | 8 | R3/8 | 13 | 11.5 | 24.5 | 26.5 | 17 | 20 |
| RT70K1410 | 10 | R1/4 | 16 | 11 | 26.4 | 25.5 | 14 | 20 |
| RT70K3810 | 10 | R3/8 | 16 | 11.5 | 26.4 | 26.5 | 17 | 20 |

RT71K



T MASCHIO LATERALE GIREVOLE CONICO BSPT


LATERAL T MALE (ROTATING BODY) TAPER BSPT

| Codice/Code | ØT | F | ØA | H | L | L1 | CH | |
|-------------|----|------|----|------|------|------|----|----|
| RT71K1804 | 4 | R1/8 | 11 | 8 | 17.7 | 18.6 | 13 | 50 |
| RT71K1806 | 6 | R1/8 | 11 | 8 | 19.8 | 18.6 | 13 | 50 |
| RT71K1406 | 6 | R1/4 | 11 | 11 | 22.1 | 23.5 | 14 | 50 |
| RT71K1808 | 8 | R1/8 | 13 | 8 | 23 | 20.5 | 13 | 50 |
| RT71K1408 | 8 | R1/4 | 13 | 11 | 23 | 23.5 | 14 | 50 |
| RT71K3808 | 8 | R3/8 | 13 | 11.5 | 24.5 | 26.5 | 17 | 20 |
| RT71K1410 | 10 | R1/4 | 16 | 11 | 26.4 | 25.5 | 14 | 20 |
| RT71K3810 | 10 | R3/8 | 16 | 11.5 | 26.4 | 26.5 | 17 | 20 |

RT69K




NEW



GOMITO FISSO MASCHIO CONICO BSPT
ELBOW MALE (NOT ROTATING BODY) TAPER BSPT

| Codice/Code | T | F | L | L1 | CH | | | |
|-------------|---|-------|------|------|----|--|--|----|
| RT69K1804 | 4 | R1/8" | 18,6 | 16,5 | 10 | | | 50 |
| RT69K1806 | 6 | R1/8" | 23,8 | 16,5 | 10 | | | 50 |
| RT69K1808 | 8 | R1/8" | 25,5 | 18,5 | 11 | | | 50 |
| RT69K1408 | 8 | R1/4" | 25,5 | 22 | 11 | | | 50 |

RT72K



GOMITO MASCHIO GIREVOLE CONICO BSPT
ELBOW MALE (ROTATING BODY) TAPER BSPT

| Codice/Code | ØT | F | ØA | H | L | L1 | CH | |
|-------------|----|------|----|------|------|------|----|-----|
| RT72K1804 | 4 | R1/8 | 11 | 8 | 17.7 | 18.6 | 13 | 100 |
| RT72K1404 | 4 | R1/4 | 9 | 11 | 19 | 23.5 | 14 | 100 |
| RT72K1806 | 6 | R1/8 | 11 | 8 | 19.8 | 18.6 | 13 | 100 |
| RT72K1406 | 6 | R1/4 | 11 | 11 | 22.1 | 23.5 | 14 | 100 |
| RT72K1808 | 8 | R1/8 | 13 | 8 | 23 | 20.5 | 13 | 50 |
| RT72K1408 | 8 | R1/4 | 13 | 11 | 23 | 23.5 | 14 | 50 |
| RT72K3808 | 8 | R3/8 | 13 | 11.5 | 24.5 | 26.5 | 17 | 50 |
| RT72K1410 | 10 | R1/4 | 16 | 11 | 26.4 | 25.5 | 14 | 50 |
| RT72K3810 | 10 | R3/8 | 16 | 11.5 | 26.4 | 26.5 | 17 | 50 |
| RT72K1210 | 10 | R1/2 | 16 | 14 | 27.9 | 31.1 | 22 | 50 |
| RT72K1412 | 12 | R1/4 | 19 | 11 | 28.9 | 26.5 | 14 | 20 |
| RT72K3812 | 12 | R3/8 | 19 | 11.5 | 28.9 | 28.1 | 17 | 20 |
| RT72K1212 | 12 | R1/2 | 19 | 14 | 28.9 | 31.1 | 22 | 20 |
| RT72K3814 | 14 | R3/8 | 21 | 11.5 | 31.5 | 30.3 | 17 | 20 |
| RT72K1214 | 14 | R1/2 | 21 | 14 | 31.5 | 31.1 | 22 | 20 |